


MOJO 761 POWER TRANSFORMER

FOR 120V OPERATION ONLY!

FOR 120V OPERATION ONLY!

Connect A to C BLACK TO BLACK/YELLOW
 Connect B to D BLACK/WHITE TO BLACK/RED

NOTE!

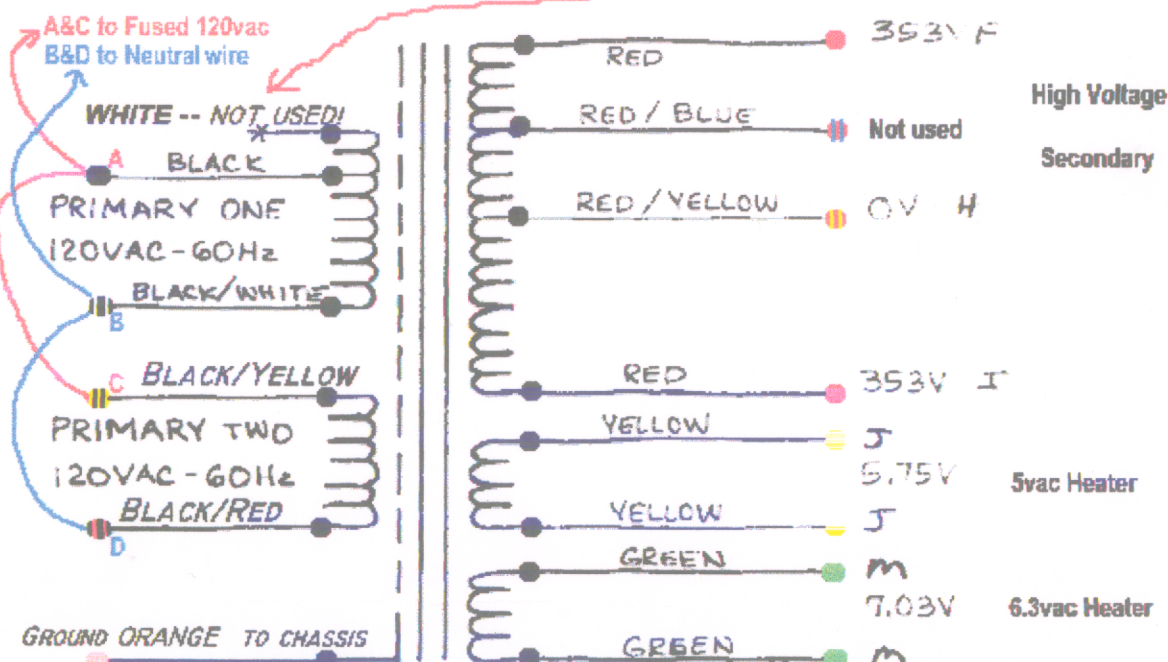

NOTE: SECONDARY VOLTAGES ARE OPEN COIL: NO LOAD
 SNIP OFF AND INSULATE UNUSED LEADS!

TYPICAL DCR'S

	DCRs
BLACK TO BLACK/WHITE :	5.09 Ω
BROWN TO BROWN/WHITE :	5.48 Ω
RED TO RED :	117.08 Ω
RED TO RED/YELLOW :	56.64 Ω
RED/YELLOW TO RED/BLUE :	6.62 Ω
RED TO RED/BLUE :	50.02 Ω
RED/YELLOW TO RED :	60.43 Ω
YELLOW TO YELLOW :	0.11 Ω
GREEN TO GREEN :	0.12 Ω

MISC. TID BITS

- 1) MOUNTING CENTERS ARE 2 1/4" x 2 13/16"
- 2) CORE LOSS IS AT 5.5 WATTS
- 3) I MAX IS 120MA


MERCURY MAGNETICS
9167 Independence Avenue
Chatsworth, CA 91311

Phone 818-998-7791
Fax 818-998-7835
Website: mercurymagnetics.com

AXIOM ®

TONE CLONE SERIES™

AXIOM FTDO-59 OUTPUT TRANSFORMER

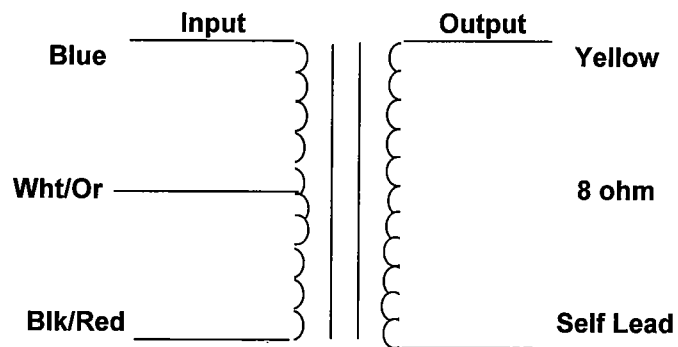

10/16/2001

